




ISA10-08S-FACE 10-Foot x 8-Foot Ice Shield

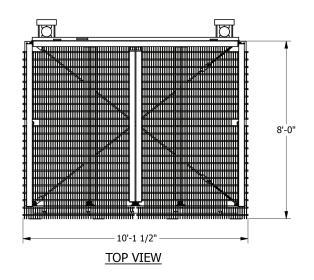

Weigh	nt		
No Ice		1/2-inch (13mm) lce	
784.7-kg	3100-lbm	1406.1-kg	
Effective Proje	cted Area		
Norm	al		
No Ice		1/2-inch (13mm) lce	
4.25-m ²	53.8-ft ²	5.00-m ²	
Transve	erse		
No Ice		1/2-inch (13mm) lce	
3.78-m ²	48.6-ft ²	4.51-m ²	
	784.7-kg Effective Proje Norm Olce 4.25-m² Transvo	784.7-kg 3100-lbm Effective Projected Area Normal olce 1/2-inch (* 4.25-m² 53.8-ft² Transverse olce 1/2-inch (*	

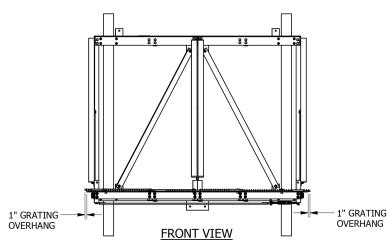

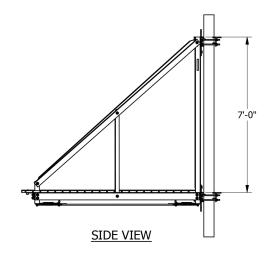

The ERI model ISA10-08S is a galvanized steel face mounted ice for uniform cross-section 8.00-foot (2438-mm) face towers. Each ice shield includes leg mount brackets to attach to round tower members from 1.25-inch (32-mm) to 8.00-inch (203-mm) in diameter.

Part Number Description

ISA10-08S-FACE Dish or Antenna Ice Shield, face mounted, steel, 10.00-feet (3048-mm) wide by 8.00-feet (2438-mm) deep (out from tower), includes hardware for attachment to tower legs from 1.25-inches (32-mm) to 8.00-inches (203-mm) in diameter on a uniform cross section tower with an 8.00-foot (2438-mm) face.

Please note, the listed weights and effective wind areas are based upon standard designs. Actual values may vary on a project by project basis. Please contact ERI if more accurate values are required.

Electronics Research, Inc. • 7777 Gardner Road • Chandler, IN 47610-9219 • USA | +1 812 925-6000 (tel) • +1 812 925-4030 (fax)